

INCH-POUND


MIL-DTL-39024/18E
3 February 2003
SUPERSEDING
MIL-C-39024/18D
19 July 1988

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING TYPE;
MICRO-MINIATURE, SINGLE TEST POINT
(2-LEG MOUNTING), LOW VOLTAGE, .080 INCH

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification and MIL-DTL-39024.

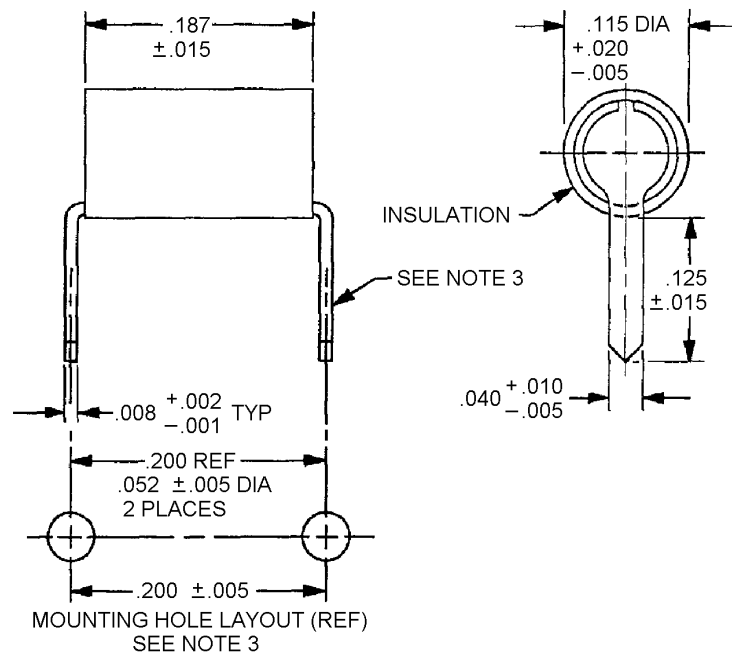

Inches	mm	Inches	mm
.001	0.03	.040	1.02
.002	0.05	.052	1.32
.005	0.13	.115	2.92
.008	0.20	.125	3.18
.010	0.25	.187	4.75
.015	0.38	.200	5.08
.020	0.51		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Mounting to fit .052 (1.32 mm) dia holes (2 holes), and lead spacing shall be such to meet .200 ± .005 mounting hole layout requirements. See operating note.
4. Dimensions are valid after plating only.

FIGURE 1. Dimensions and configuration.

AMSC N/A

1 of 3

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

MIL-DTL-39024/18E

TABLE I. Dash number and identification data.

Dash number	Insulation color in accordance with MIL-STD-104
01	White
02	Yellow
03	Brown
04	Red
05	Orange
06	Black
07	Green
08	Blue
09	Gray
10	Purple

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Contact: Contact shall be phosphor bronze in accordance with ASTM B139.

Insulation: Material shall be polytetrafluoroethylene in accordance with MIL-I-22129 or equal.

Test probe: 0.080 ± 0.001 inch in diameter (connector shall accept test probe from either end).

Operating voltage: 1,000 volts rms, maximum.

Operating temperature range: -65°C to +200°C.

Insulation resistance: Test circuit in MIL-DTL-39024 shall be used.

Dielectric withstanding voltage: Test circuit in MIL-DTL-39024 shall be used.

Test voltage (sea level): 1,000 volts rms, 60 hertz, shall be applied for 15 seconds.

Test voltage (50,000 feet): 350 volts rms, 60 hertz, shall be applied for 15 seconds.

Insertion and withdrawal forces:

Insertion force: 10.0 pounds (max).

Withdrawal force: 0.5 pound (min).

Resistance to test probe damage: $\frac{1}{2}$ inch-pound moment shall be used for insertion depth of $\frac{3}{16}$ inch and $\frac{1}{4}$ inch.

Shock (specified pulse): Method 213, test condition I of MIL-STD-202.

MIL-DTL-39024/18E

Vibration, high frequency: 15 g's at 10 to 2,000 Hz, method 204, test condition B of MIL-STD-202.

Durability: 150 insertion/withdrawal cycles.

Identification marking:

Part or Identifying Number (PIN): M39024/18-(dash number from table I).

Operating conditions:

These connectors are designed for 1/16 inch nominal thickness printed wiring board
(PIN M39024/18-01 thru 10)

Supersession data: This specification includes the requirements of contractor (90348) specification 2134873; contractor (05869) specification 716007.

Note: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:

Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:

DLA - CC

(Project 5935-4438-008)

Review activities:

Army - AR, CR4, MI
Navy - AS, CG, MC
Air Force - 19